


VersiTank® 555 and 553


Stormwater Management



VersiTank® offers architects, engineers and property owners an efficient and cost-effective method to reduce stormwater run-off in urban environment.

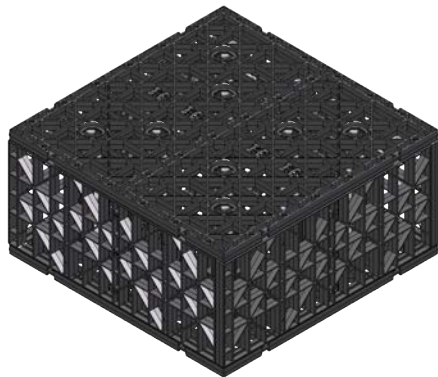


VersiTank® 553

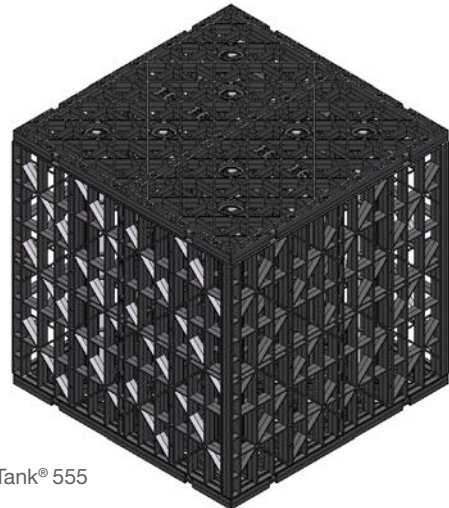


VersiTank® 555

VersiTank® 555 and 553 sub-surface water infiltration storage tanks provide efficient, cost-effective and environmentally sustainable solutions for stormwater control and management. The systems restore on-site natural water filtration, control release of surface run-off, and also enable harvesting of water on-site for reuse.

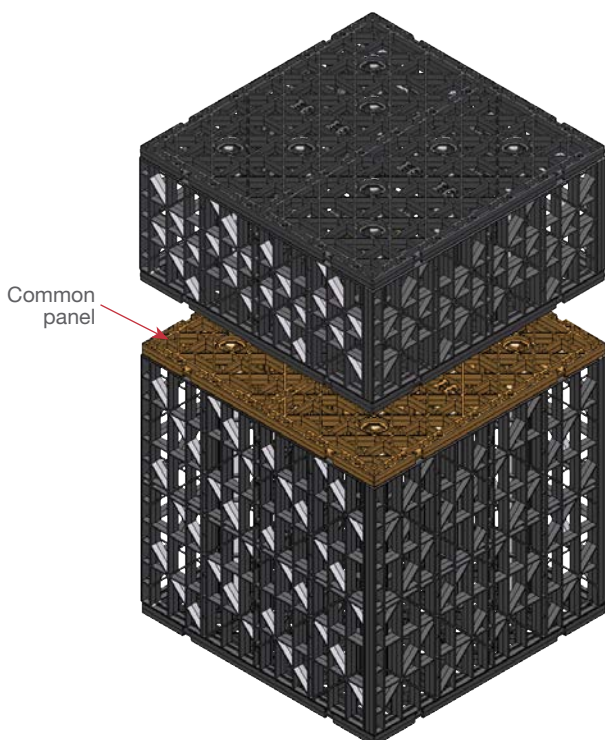

When the tanks are stacked on top of each other, they share a common panel resulting in cost savings and efficiency.

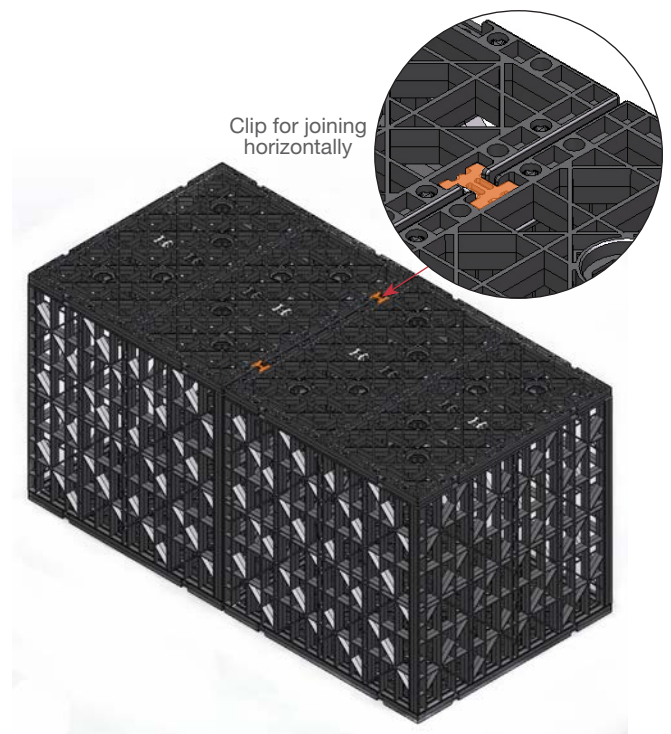

VersiTank® 555 and 553 are easy to install and may be joined horizontally and vertically to accommodate specific installation requirements.

Technical Specifications

Material	Recycled Polypropylene
Size	
VT 555	500 mm (L) x 500 mm (W)
VT 553	500 mm (L) x 500 mm (W)
Height	
VT 555	500 mm
VT 553	250 mm
Volume	
VT 555	0.125 m ³
VT 553	0.063 m ³
Compressive Strength	
VT 555	> 20 t/m ²
VT 553	> 30 t/m ²
Surface Area	
VT 555	1.5 m ²
VT 553	1.0 m ²
Surface Void	~65%
Internal Void	~95%
Colour	Black
Biological/Chemical Resistance	Unaffected by moulds and algae Good resistance to alkali and bitumen

Advantages

- Provides efficient drainage
- Reduces irrigation requirement
- Protects waterproofing membrane
- Enable on-site rainwater retention
- Lightweight and durable
- Recyclable
- Suitable for retrofitting and/or new projects
- Mitigate urban runoff
- High water storage capacity



A security hologram has been applied on all our products to ensure that the end-user receives the best quality and original Elmich product.

Distributed by:

Note: The information provided in this brochure is based on current knowledge and experience and does not infer any legally binding assurance or warranty, expressed or implied. Intending purchasers should verify whether any changes to specifications or applications or otherwise have been made since the issue of this literature. Environmentally-friendly recycled materials are used in product manufacture wherever possible. Physical product properties including colour may differ due to source of raw materials used. Colour may also fade due to UV exposure. All components of the product are designed for specific application, design calculations and any variation and/or deviation therefrom shall be the responsibility of the specifier and/or user.



ELMICH PTE LTD www.elmich.com

Singapore: (+65) 6356 2800

info@elmich.com

Singapore | Australia | Germany | Malaysia | Switzerland | USA



Management System
ISO 9001:2015
ISO 14001:2015
ISO 22301:2012
www.hnz.com
ID 9105067487

