

C | VersiJack®

Series | Paver and Deck Support



Creating Cities
Where Urban Meets Nature

Our Innovation Your Solution

VersiJack® is an advanced generation of pedestals engineered to provide a versatile and sustainable solution to support raised pavers and decking. It improves heat and sound insulation, facilitates rapid surface drainage and creates an easily accessible chamber to conceal mechanical and electrical services. The pedestals are easy-to-use across its extensive height range allowing for an efficient and cost-effective solution.

Available in Australasia, Europe and US only




Engineered in Australia



VersiJack® C

VersiJack® C consists a range of eight pedestals that extend from 13 mm to 1014 mm. It is complemented by a comprehensive list of accessories to accommodate installations of various requirements. Engineered to reduce material, construction, and lifecycle costs, VersiJack® C pedestals offer a versatile and sustainable solution for supporting raised pavers and decking.

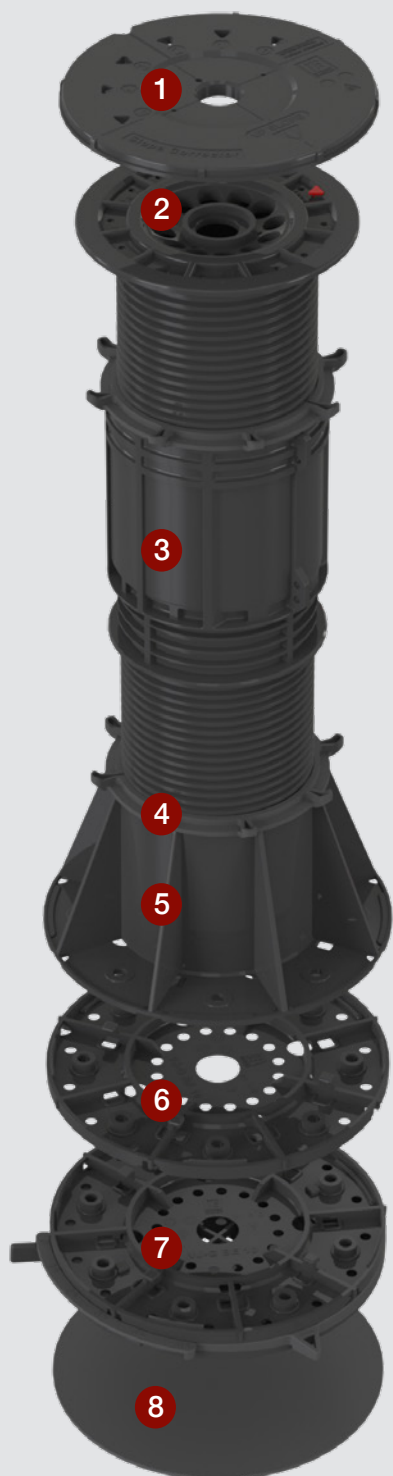

About VersiJack® C

VersiJack® C provides the options of both top and bottom slope correction compensating for gradients to create leveled surfaces. Using a Bottom Slope Corrector allows the pedestal to remain firmly upright on an incline.

VersiJack® C has a large flat base with rounded edges to prevent compromise of the waterproofing membrane. The perforated base prevents the breeding of insects resulting from ponding. Grooves allow the base to be cut to fit wall corners and edges.

1 Top Slope Corrector

Creates level surfaces by compensating for gradients up to 5%.

2 Pedestal Top

Designed to integrate seamlessly with all existing VersiJack accessories.

3 Barrel Extender

Requires only 3 extenders to reach a maximum height of 1014 mm.

4 Locking Ring

Locking rings on the pedestal top and barrel extender ensure individual pedestals are secured at the desired heights.

5 Pedestal Base

Large contact surface provides uniform weight distribution. Drainage holes prevent water pooling.

6 Base Extender

The clip-on base extender allows for simple and quick height increment.


7 Bottom Slope Corrector

Allows pedestals to remain firmly upright on inclines of up to 5%.

8 Dampening Pad



Self-adhesive thermoplastic foam pad protects the underlying membrane and acts as an acoustic and vibration dampening layer.

VersiJack® Accessories





Wall Spacer

Wall Spacer serves as a permanent compressible buffer to allow for expansion, contraction, and paver movement.




Vertical Edge Clips

Vertical Paver Clips allow pavers to be installed upright to create a closed edge installation.




Variable Angle Spacer Tab

Variable Angle Spacer Tab has rotatable posts to support up to 6 pavers with different corner angles.





Bearer Holder

Bearer Holder keeps 35 mm to 80 mm bearers firmly centered in place on pedestals.





Concealed Paver Retainer

Concealed Paver Retainer increases wind uplift resistance for elevated roof pavers while remaining invisible.




Exposed Paver Retainer

Exposed Paver Retainer increases wind uplift resistance for elevated roof pavers.




Timber Tile Fastener

Timber Tile Fastener is a hidden fastener for removable timber tile.



Pedestal Shim

Allows for minor height increments, as well as providing sound and vibration dampening.




Technical Specifications

Material	PP
Height range	13 mm to 1014 mm
Ultimate compressive strength ¹	
- CT series (Max. height @5 mm displacement)	13 - 24 kN
- CF series (Max. height)	15 - 19 kN
Design compressive strength	10 kN
Slope correction	
- Top	up to 5%
- Bottom	up to 5%
Base	
- Diameter	205 mm
- Height extension	10 mm
Spacer tab post	
- Height	12 / 15 / 25 mm
- Thickness	2 / 3 / 4 / 5 / 6 / 8 / 10 mm (gap between pavers)
Bearer holder	35 mm to 80 mm (bearer width)
Biological / Chemical resistance	Unaffected by moulds and algae. Good resistance to alkali and bitumen.

¹ varies with different height


Advantages

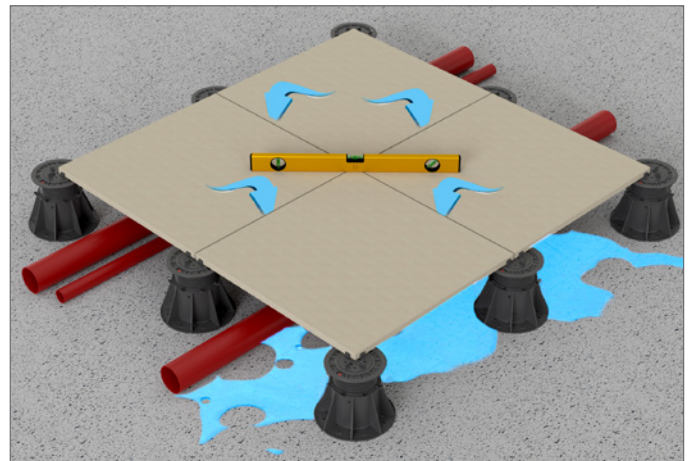

- 1 Conceals unsightly services
- 2 Rapid drainage
- 3 Quick installation with Turning Tool
- 4 Creates usable space
- 5 Ease of access
- 6 Thermal insulation
- 7 Acoustic insulation
- 8 Recyclable components



VersiJack® C Height Table (mm)

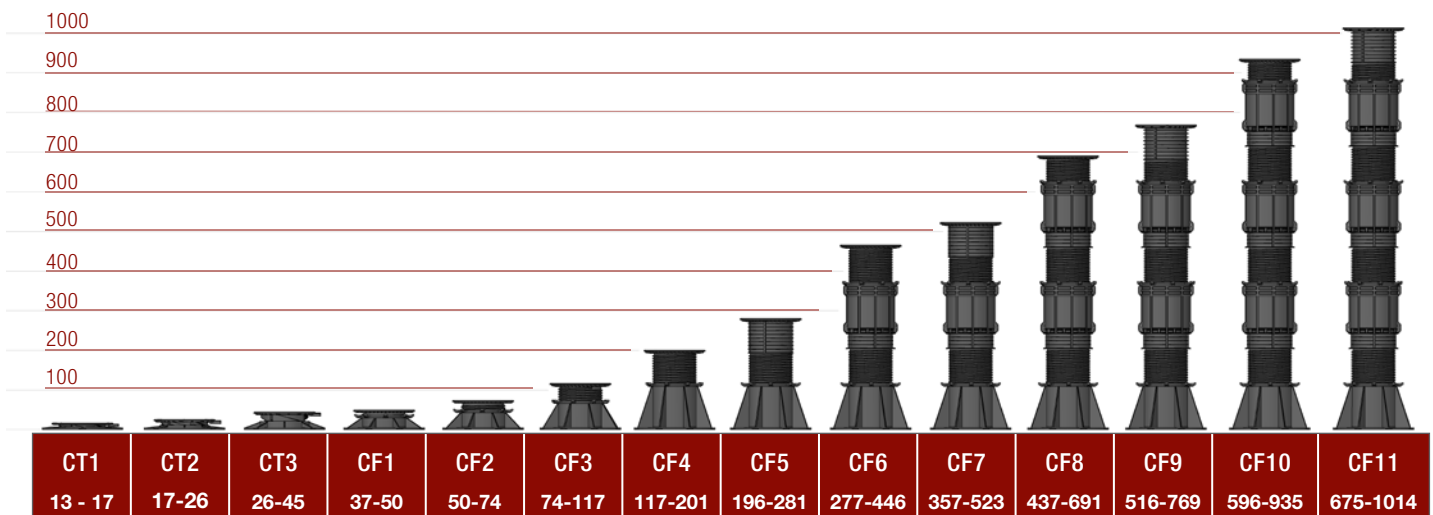

The Elmich security hologram ensures authenticity of the products.

Distributed by:

Note: The information provided in this brochure is based on current knowledge and experience and does not infer any legally binding assurance or warranty, expressed or implied. Intending purchasers should verify whether any changes to specifications or applications or otherwise have been made since the issue of this literature. Environmentally-friendly recycled materials are used in product manufacture wherever possible. Physical product properties including colour may differ due to source of raw materials used. Colour may also fade due to UV exposure. All components of the product are designed for specific application, design calculations and any variation and/or deviation therefrom shall be the responsibility of the specifier and/or user.



ELMICH PTE LTD www.elmich.com

Singapore: (+65) 6356 2800

info@elmich.com

Singapore | Australia | Germany | Malaysia | Switzerland | USA

