

VersiDrain® 150 v2

Modular Planting Tray



We make the difference.
The Elmich Difference.



VersiDrain® 150 v2


VersiDrain® 150 v2 is a lightweight interlocking modular green roof tray with a high wall, suitable for pre-planting off-site.

Made from high-strength UV-stabilised polypropylene, each tray has a 75 mm deep reservoir that stores up to 40 litres per square metre of rainwater for irrigating the plants, reducing watering requirements and costs, whilst promoting plant growth.



Add-Ons

Additional accessories can be fitted on each VersiDrain® 150 v2 tray to enhance its functionality.

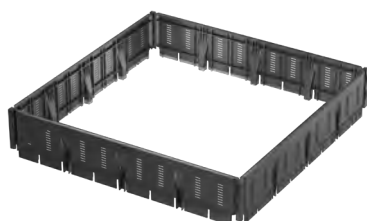

Wall Extender
Increase planting depth by 75 mm



Geotextile Filter Sheet
Retains planting media, preventing clogging in the reservoir




Capillary Wick
Conveys water to planting media, ensuring they are kept moist

Technical Specification

Material	PP
Dimensions	500 mm x 500 mm x 150 mm
Planting media height	75 mm
Reservoir capacity	40 l/m ²
Weight	
Empty	<10 kg/m ²
Planted	~120 kg/m ²

Typical Detail

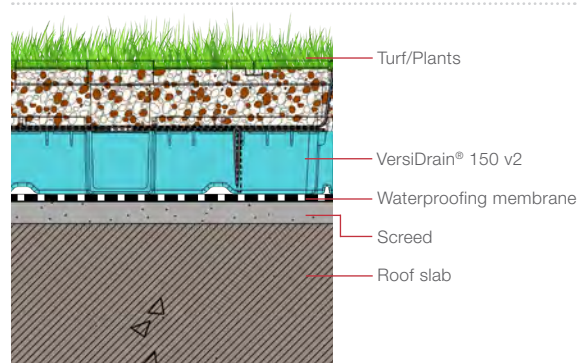

The Elmich security hologram ensures authenticity of the products.



Management System
ISO 9001:2015
ISO 14001:2015
ISO 22301:2019
www.tuv.com
ID 8102967487



ESTABLISHED MEMBER



Celebrating Singapore's
Enterprising Spirit 2018



Elmich Pte Ltd

t +65 6356 2800
e info@elmich.com

Singapore • Australia • Malaysia
Switzerland • Germany • USA

Note The information provided in this brochure is based on current knowledge and experience and does not infer any legally binding assurance or warranty, expressed or implied. Intending purchasers should verify whether any changes to specifications or applications or otherwise have been made since the issue of this literature. Environmentally-friendly recycled materials are used in product manufacture wherever possible. Physical product properties including colour may differ due to source of raw materials used. Colour may also fade due to UV exposure. All components of the product are designed for specific application, design calculations and any variation and/or deviation therefrom shall be the responsibility of the specifier and/or user.